




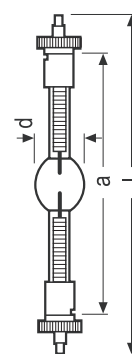


## Metal halide lamps

Double-ended

MHK<sup>®</sup> Product informationProduct reference : **MHK400**

<b>W</b>	Rated wattage	400
<b>V</b>	Rated voltage	50
<b>A</b>	Rated current	8.5
<b>K</b>	Color temperature	7500
<b>lm</b>	Luminous flux	26000
<b>t[h]</b>	Average life	750
<b>Hr</b>	Hot restart	Yes
<b>lm/W</b>	Luminous efficacy	65
<b>Ra</b>	Color rendering index	80
	Arc length	3
	Diameter d	17
	Distance a	115
	Max. Length l	136
	Operating position	Any
	Base	Sfc 10-4
	Cooling	Convection
	Type of current	AC
	Comparison of type	Osram HTI 400W/D3/60



## Spectral power distribution

