











Metal halide lamps

Double-ended

MHK[®]

 Product information
Product reference : **MHK2500**

W	Rated wattage	2500
V	Rated voltage	115
A	Rated current	25.6
K	Color temperature	6000
lm	Luminous flux	240000
t[h]	Average life	500
Hr	Hot restart	Yes
lm/W	Luminous efficacy	95
Ra	Color rendering index	90
	Arc length	14
	Diameter d	31.5
	Distance a	290
	Max. Length l	355
	Operating position	Horizontal $\pm 30^\circ$
	Base	Sfa 21-12
	Cooling	Convection
	Type of current	AC
	Comparison of type	Osram HMI 2500W/GS Philips MSI 2500W

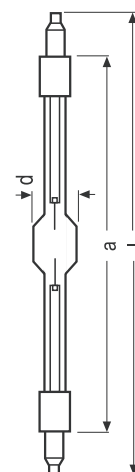

Spectral power distribution

