








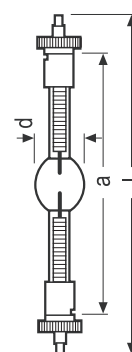


Metal halide lamps

Double-ended

MHK[®] Product informationProduct reference : **MHK700**

W	Rated wattage	700
V	Rated voltage	70
A	Rated current	10
K	Color temperature	6000
lm	Luminous flux	55000
t[h]	Average life	750
Hr	Hot restart	Yes
lm/W	Luminous efficacy	80
Ra	Color rendering index	80
	Arc length	4
	Diameter d	18
	Distance a	115
	Max. Length l	136
	Operating position	Any
	Base	Sfc 10-4
	Cooling	Convection
	Type of current	AC
	Comparison of type	Osram HTI 700W/D4/60



Spectral power distribution

