











## Metal halide lamps

Double-ended

# MHK<sup>®</sup>

 Product information
Product reference : **MHK1500 DX**

<b>W</b>	Rated wattage	1500
<b>V</b>	Rated voltage	100
<b>A</b>	Rated current	13
<b>K</b>	Color temperature	5600
<b>lm</b>	Luminous flux	135000
<b>t<sub>[h]</sub></b>	Average life	750
<b>Hr</b>	Hot restart	Yes
<b>lm/W</b>	Luminous efficacy	92
<b>Ra</b>	Color rendering index	90
	Arc length	7
	Diameter d	25
	Distance a	115
	Max. Length l	136
	Operating position	Any
	Base	Sfc 10-4
	Cooling	Forced
	Type of current	AC
	Comparison of type	Osram HTI 1500W/D7/60

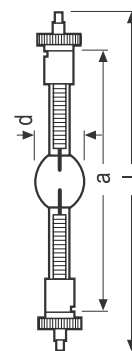

## Spectral power distribution

