

JCL™ ST-HR

Ceramic Metal Halide Lamp

HOT RESTART

FOR STUDIO, FILM, VIDEO & PUBLIC BUILDING


NEW

- ◆ Bigger Wattage (150W~500W)
- ◆ Short Arc
- ◆ Hot Restart



型號 Model	瓦數 Wattage (W)	電壓 Voltage (V)	電流 Current (A)	色溫 Color Temp. (K)	光通 Luminous Flux (Lm)	發光效率 Luminous Efficacy (Lm/W)	平均壽命 Average Life (Hr)
JCL ST 150 HR	150	90	1.6	3000	15000	100	6600
JCL ST 150/2 HR	150	90	1.6	4000	14000	93	6600
JCL ST 250 HR	250	95	2.6	3200	25000	100	4000
JCL ST 250/2 HR	250	95	2.6	3800	23000	92	4000
JCL ST 500 HR	500	95	5.2	3200	40000	80	1000

型號 Model	弧光長度 Arc Length	管徑 Diameter d	光中心 Diameter a	總長 Max. Length l	燈座 Base	安裝角度 Operating Position	圖形 Fig.
JCL ST 150 HR	6.0	22	61	110	GZY9.5	Any	1
JCL ST 150/2 HR	6.0	22	61	110	GZY9.5	Any	1
JCL ST 250 HR	8.0	22	61	110	GZY9.5	Any	2
JCL ST 250/2 HR	8.0	22	61	110	GZY9.5	Any	2
JCL ST 500 HR	14.5	38	85	175	GY22	Any	3

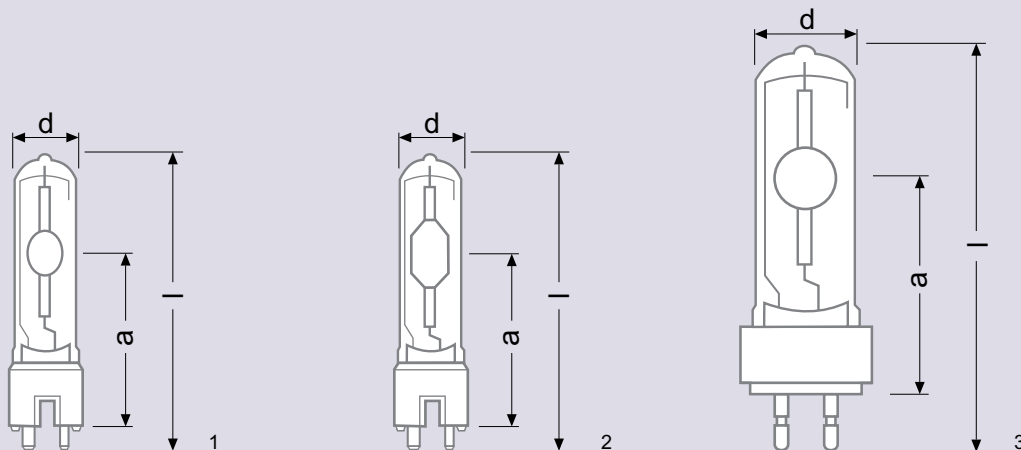

JENBO

JENBO LIGHTING INTERNATIONAL CO., LTD.

<http://www.jenbo.com>

service@jenbo.com

TEL: +886-2-26281171

FAX: +886-2-26281121